



Features

- State of the art, fully pneumatic Air Motors, 3–4–6–8 inches (76–101–152–203 mm) diameter.
- Full 6" stroke for greater output per cycle.
- Modular design for easy repair.
- Only 5 moving parts, no metal to metal contact.
- Newly designed pump tubes offer ratios and outputs to fit any application.
- Available to fit any drum or pail size.
- Offered in carbon steel, stainless steel or hard chrome plated.
- Complete selection of packing materials available.
- Full line of priming equipment and mounting devices.
- Ball style for fluid materials, shovel foot style for high viscosity non-fluid materials.



Series III Air Motors

- Full pneumatic operation for longer life and durability—only five moving parts.
- Total modular design for ease of service and maintenance.
- Quiet operation—meets or exceeds OSHA requirements at all recommended operation air pressures.
- Interchangeable with all PowerMaster® III Pump Tubes.
- Acceptability of Pump Monitors and controls.



AirBrake™

- Shuts down pump immediately when excessive pump cycle speed (runaway) occurs.
- Prevents pump damage due to a runaway condition.
- Indicates system fault caused by empty container or broken supply line.
- Limits spills due to pump outlet hose failure.
- Sends fault signal to remote alarm locations with optional 244398 signal kit.
- Can be ordered already installed (refer to Pump Specification Chart).
- Can be added later. Order Model 84988.

See Pump Selection Chart in this section.



Model 84985

Pump Tubes—Ball Foot Design

- For light to medium viscosity, fluid materials.
- Available in 3 styles: stub length for bulk mounting, 55 gallon or 16 gallon drum size.
- Complete packing selection for total chemical compatibility.
- Ratios from 6:1—42:1, outputs to 3.9 gpm (14.6 lit/min.).
- Complete interchangeability with all Series III Air Motors.
- Exclusive, patented, “leakless” gland assembly kit is available as an accessory.



Model 84991

Pump Tubes—Shovel Foot Design, Plunger and Bushing Style

- For medium to high viscosity, non-fluid materials.
- Available in 55 gallon or 16 gallon drum lengths, or mounts on pressure primer for very high viscosity materials.
- Full range of ratios: 12:1 through 84:1 for all applications.
- Selected fit, hardened steel plunger and bushing is particularly well suited to viscous lubricants.
- No washers, o-rings or packings to replace on pump piston for ease of maintenance.
- Shovel foot adds mechanical priming to normal suction, assures positive prime with the most viscous of lubricants.
- Complete interchangeability with all Series III Air Motors.
- Exclusive patented, leakless gland assembly kit (to protect gland seal—the only seal in pump tube) is available as an accessory.



Model 84976

Pump Tubes—Shovel Foot Design, Packed Piston Style

- Furnished with exclusive, patented, leakless gland assembly.
- For medium to high viscosity, non-fluid materials.
- Available in 55 gallon or 16 gallon drum lengths; also suitable for mounting on priming equipment or standpipe mounting for bulk delivery.
- Full range of packing materials available for product compatibility.
- Complete interchangeability with all Series III Air Motors.
- Full range of ratios: 10:1 through 80:1.
- Specifically designed to enhance growing market for dispensing industrial type materials: sealants, adhesives, urethanes, inks, etc. . .

See Pump Selection Chart in this section.

Industrial Pumping Equipment

PowerMaster® III Pump Selection Chart



Low to Medium Viscosity Pumps—Carbon Steel for Transfer of Non-Corrosive Materials

Ball Pumps

Ratio	Pump Model Std. Air Motor Only	Pump Tube Style	Air Motor Model	Diameter in. / mm	Pump Tube Model	Material Outlet N.P.T.F.	Output Per Cycle cu. in. / cc	Approximate Cycles per gal / liters
24:1	2021	55 gal	Std. 84806 w/ AirBrake *94806	6 / 152	84985	¾"	11.9 / 195	20 / 5
12:1	2001	55 gal	Std. 84804 w/ AirBrake *94804	4¼ / 108	84985			
	2014	Stub			84986			
6:1	2052	55 gal	Std. 84803	3 / 76	84985			
	2051	Stub			84986			

Shovel Foot Pumps—Packed Piston

32:1	*2076	16 gal	Std. 84804 w/ AirBrake *94804	4¼ / 108	84979	¾"	4.6 / 75	51 / 13
20:1	*2075	16 gal			84977		6.7 / 110	35 / 9
10:1	*2066	55 gal	Std. 84803	3 / 76	84976			

Shovel Foot Pumps—Plunger and Bushing

80:1	2023	55 gal	Std. 84806 w/ AirBrake *94806	6 / 152	84993	¾"	3.7 / 61	63 / 16
75:1	2004	55 gal	Std. 84804 w/ AirBrake *94804	4¼ / 108	84997		2.1 / 34	111 / 29
	2008	16 gal			84998		3.0 / 49	78 / 20
50:1	2010	55 gal			84995			
	2011	16 gal			84996			
24:1	2002	55 gal			84991		6.1 / 100	38 / 10

* Order pump tube and air motor separately for these 8 models or when ordering AirBrake™ equipped models.

Other PowerMaster Air Motor/Pump Tube Combinations (all feature ¾" NPTF Material Outlet)

Carbon Steel Ball Type

Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM/LPM Free Delivery 70 CPM
42:1	55 gal	Std. 84808 w/ AirBrake *94808	84985	3.9 / 14.6
	16 gal		84984	
	Stub		84986	
24:1	16 gal	Std. 84806 w/ AirBrake *94806	84984	
	Stub		84986	
12:1	16 gal	Std. 84804 w/ AirBrake *94804	84984	
6:1	55 gal	Std. 84803	84985	
	Stub		84986	

Carbon Steel Shovel Type Plunger & Bushing

Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM/LPM Free Delivery 70 CPM
84:1	55 gal	Std. 84808 w/ AirBrake *94808	84991	2.0 / 7.5
	16 gal		84992	
80:1	16 gal	Std. 84806 w/ AirBrake *94806	84994	1.2 / 4.5
48:1	55 gal		84991	2.0 / 7.5
	16 gal	84992		
40:1	55 gal	Std. 84804 w/ AirBrake *94804	84993	1.2 / 4.5
	16 gal		84994	
24:1	16 gal	84992	2.0 / 7.5	
36:1	55 gal	Std. 84803	84997	0.7 / 2.6
	16 gal		84998	
24:1	55 gal		84995	1.0 / 3.7
	16 gal		84996	
	55 gal		84993	
20:1	16 gal		84994	1.2 / 4.5
	55 gal		84991	
12:1	16 gal		84992	2.0 / 7.5

* Order pump tube and air motor separately.

Carbon Steel Shovel Type Packed Piston

Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM/LPM Free Delivery 70 CPM
80:1	55 gal	Std. 84808 w/ AirBrake *94808	84976	2.2 / 8.2
	16 gal		84977	
64:1	55 gal	Std. 84806 w/ AirBrake *94806	84978	1.5 / 5.7
	16 gal		84979	
44:1	55 gal		84976	2.2 / 8.2
	16 gal		84977	
32:1	55 gal	Std. 84804 w/ AirBrake *94804	84978	1.5 / 5.7
	55 gal		84976	2.2 / 8.2
15:1	55 gal	Std. 84803	84978	1.5 / 5.7
	16 gal		84979	
10:1	16 gal		84977	2.2 / 8.2

Industrial Pumping Equipment

PowerMaster® III Pump Selection Chart



Ball Pumps

Gallons / Liters Per Minute			Minimum I.D. Air Supply Hose in. / mm	Air Consumption Per Cycle			
30 CPM	50 CPM	70 CPM		S.C.F.M. @ 70 psig	M ³ /Min. @ 4.8 bar	S.C.F.M. @ 100 psig	M ³ /Min. @ 6.8 bar
1.5 / 5.8	2.6 / 9.7	3.9 / 14.6	½" / 12	1.1	0.031	1.6	0.045
				0.8	0.023	1.1	0.031
			¾" / 10	0.5	0.014	0.7	0.02

Shovel Foot Pumps—Packed Piston

0.6 / 2.3	1.0 / 3.8	1.5 / 5.7	½" / 12	0.8	0.023	1.1	0.031
0.9 / 3.3	1.5 / 5.5	2.2 / 8.2					
0.9 / 3.3	1.5 / 5.5	2.2 / 8.2	¾" / 10	0.5	0.014	0.7	0.02

Shovel Foot Pumps—Plunger and Bushing

0.5 / 1.8	0.8 / 3.0	1.2 / 4.5	½" / 12	1.1	0.031	1.6	0.045
0.3 / 1.0	0.5 / 1.7	0.7 / 2.6		0.8	0.023	1.1	0.031
0.4 / 1.5	0.6 / 2.5	1.0 / 3.7					
0.8 / 3.0	1.3 / 5.0	2.0 / 7.5					

Note: Air motors and pump tubes shipped separately. Assembly required.

Other PowerMaster Air Motor/Pump Tube Combinations (all feature 3/4" NPTF Material Outlet)

Hardened Steel Ball Type


Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM / LPM Free Delivery 70 CPM
42:1	55 gal	84808 w/ AirBrake *94808	84983	3.9 / 14.6
24:1		84806 w/ AirBrake *94806		
12:1		84804 w/ AirBrake *94804		
6:1		84803		

Chrome Plated Ball Type

Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM / LPM Free Delivery 70 CPM
42:1	55 gal	84808 w/ AirBrake *94808	84982	3.9 / 14.6
24:1		84806 w/ AirBrake *94806		
12:1		84804 w/ AirBrake *94804		
6:1		84803		

Stainless Steel Ball Type

Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM / LPM Free Delivery 70 CPM
42:1	55 gal	84808 w/ AirBrake *94808	84981	3.9 / 14.6
	Stub		84987	
24:1	55 gal	84806 w/ AirBrake *94806	84981	
	Stub		84987	
12:1	55 gal	84804 w/ AirBrake *94804	84981	
	Stub		84987	
6:1	55 gal	84803	84981	
	Stub		84987	

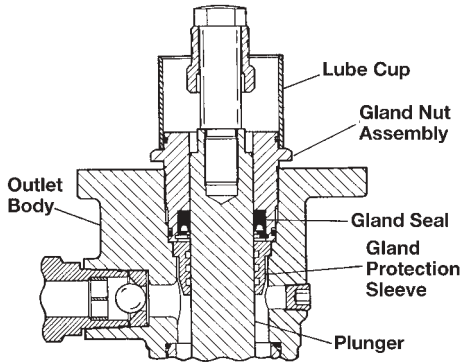

Patented* Leakless Gland Assembly

The gland seal of all reciprocating positive displacement pumps is its weakest point and is the single most common cause of pump failure, lost downtime and maintenance expense. Lincoln's new gland design uniquely addresses the causes for premature gland seal failure.

A special protective bushing (or sleeve) with concentric grooves creates a labyrinth path to reduce the internal operational pressure as well as the pressure fluctuations developed during pump stroke changeover.

Leakless Gland Assembly is standard with Packed Piston Pumps and is available for all PowerMaster III Pumps, as an accessory.

* U.S. Patent No. 4,976,192



Model 86214

Gland Protection Sleeves

Order Model	For Pump Tubes
86214	All Ball Foot Design Pump Tubes
86215	84997 & 84998
86216	84993 & 84994
86217	84995 & 84996
86218	84991 & 84992



Model 86213

Model 86213 Lube Cup Kit

For all PowerMaster® III pump tubes. Used in conjunction with the gland protection sleeve to prolong service life of gland packing. Prevents material from drying out on plunger.

Packing Kits for PowerMaster® III Pump Tubes

Lincoln offers alternate packing kits of Teflon for some PowerMaster III Pump Tubes because many materials used in today's manufacturing environment may not be compatible with the standard seals. Please consult Lincoln for compatibility of the material to be dispensed with standard packings or alternate packing kits.

Teflon is a registered trade mark of the Dupont Company.



Model 84502

Pump Tube	Teflon Kit
84982	84502
84984	
84985	
84986	
84987	



Model 81412



Model 83166



Model 81538



Model 83369



Model 83132



Model 84963



Model 84826



Model 84945



Model 16177



Model 84377



Model 83727

Drum Covers

Model 81412

Standard 55 gallon drum cover for mounting PowerMaster III series drum pumps on full open drums.

Model 83166

Special 55 gallon drum cover for mounting PowerMaster III series drum pumps on full open drums. Includes port for installation of material agitator.

Model 81538

Standard 16 gallon drum cover for mounting PowerMaster III series drum pumps on full open drums.

Follower Plates

Model 83369

For 400 pound drums.

Model 84780

For 120 pound drums.

Model 83132 Bung Bushing

This 55 gallon drum bung bushing screws into the bung opening of the drum to secure any Lincoln PowerMaster III Pump.

Model 84963 Flange Mounting Assembly

Used for rigid mounting of PowerMaster III Pumps to the top of fabricated bulk tanks.

Model 84826 Wall Mount Bracket Kit

For PowerMaster III Air Motor assemblies.

Model 84945 Suction Kit

Used with PowerMaster III Stub Pumps for convenient transfer of petroleum products from drums, bulk tanks or reservoirs. Includes bung bushing suction tube, hose and coupling assembly and other hardware.

Note: 2"x1" bell reducer required—not included.

Model 16177 Foot Valve Adapter

Converts inlet of Models 84984 and 84985 Ball Type PowerMaster III Pumps to 1½" NPTF female thread for attaching extension pipe.

Drum Dollies

Model 84377

55 gallon (400 lbs) band-type drum dolly with four swivel casters and screw clamps.

Model 84192

16 gallon (120 lbs) band-type drum dolly with four swivel casters and screw clamps.

Model 83727 Standpipe/Model 83732 Adapter Kit

Use of Model 83732 Adapter & Bracket Kit will enable PowerMaster III pumps to be assembled to Model 83727 Stand Pipe for pumping from bulk tanks. Inlet 3" NPT female.